



UL316-10RW

10W (1 x10W) RGBW

12VAC or 24VDC



Dry or Submersible CAST 316L SS

Replaceable LEDs



Specifications

Input voltage	12VAC or 24VDC
Output power	10 watts (1x10W)
Luminous flux output	100 to 110 lm/W
Rendering Index	>70rA (warm white)
Beam angle	25° lens
LEDs	Replaceable - Internal Driver
Material	Cast 316L STAINLESS STEEL
Face ring	silicone gasket - tempered glass faceted lens
Color options	Standard 'sparkle matt' SS or mirror polish w/ niche
White	RGBW
LEDs operating life	CREE- XPE - 2700K TO 6500K
IP rating	> 50,000 hours REPLACEABLE LEDs
Cable	IP68 - CERTIFIED SUBMERSIBLE OR DRY
Dimensions	9 FEET- SOW 18/5 longer lengths can be ordered
Certifications	Diameter 3.2"x 6"H with yoke
Installation	cULus CSA22.2 no.89 - including swimming pools and splash pads
	Submersible or Dry

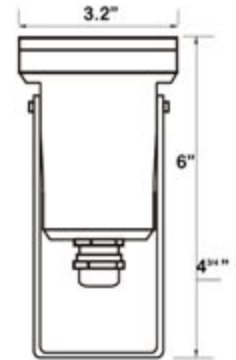

Unmei

LED LIGHTING & CIRCUITRY
See the world in a whole new light