




Optional flange 4" OD



2" MNPT

UL316-ORION

**5W - Cree White-DMX * 5W RGBW-DMX
12VAC or 24VDC -
Dry or Submersible CAST 316L SS
Optional flange
Replaceable LEDs**

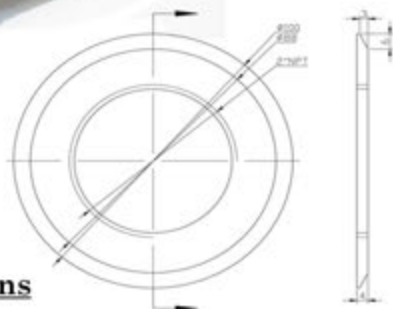

Specifications

Input voltage	12VAC or 24VDC
Output power	1 x 5W Cree white or 1 x 5W - RGBW
Luminous flux output	100 to 110 lm/W
Rendering Index	>70rA (warm white)
Beam angle	25 degrees - optional 10,25,45,60,90
LEDs	Replaceable - Internal Driver
Material	Cast 316L STAINLESS STEEL silicone gasket - tempered glass lens
Flange	optional- removeable-black or silver SS with lock nut
Color options	RGB-DMX or RGBW
White	CREE- XPE - 2700K TO 6500K
LEDs operating life	> 50,000 hours REPLACEABLE LEDs
IP rating	IP68 - Submersible or Dry
Cable	9 FEET- SOW 18/5
Dimensions	2" MNPT x 5 3/16"
Certifications	cULus CSA22.2 no.89 - including swimming pools and splash pads
Installation	Threads into 2" NPT or suspend by flange

